


## FMDA-02P

- 紧凑型结构,厚度仅为12.4mm。
- 自主知识产权技术,确保产品连接稳定。
- 产品接地件直接与轨道连接地,减少现场布线。
- 插拔防呆技术,保证产品无反插风险导致电路短路。
- Compact structural design,only12.4mm thickness.
- Proprietary intellectual property rights technology,ensure product connection stable.
- Earthing parts connects din rail directly reducing field wiring.
- Misplug-proof technology ensure product no short circuit risk because of misplug.

FMDA-02P

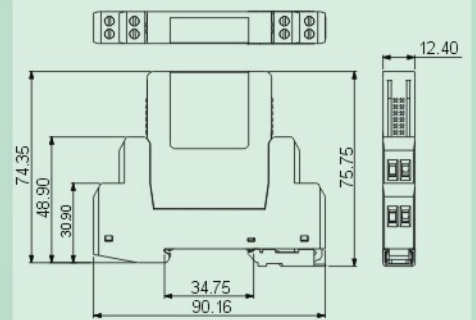

### 技术参数 Technical data

APPROVAL: **CE**

型号 Model	线径 Wire range (AWG/mm <sup>2</sup> )	线数 Poles	IEC60947技术参数 (IEC60947 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
FMDA-02P	28-12/1.0-2.5	02P	-	-	25	1

### 应用行业 Application

仪器仪表等行业。  
Instrument.



### 产品包装方式 Packing

Product model	Pcs./Pkt.
FMDA-02P	10

### 型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
FMDA-02P	RES系列	-

### 产品订货 How to order

FMDA	-	0	2	P	-	1	8	-	0	0	A(B)
Series NO.		NO. of pole							Standard		
		1 Single pole	2 Double pole				8		通用色 General Color		
								Yellow	PANTONE	108C	DEGSON
											08