
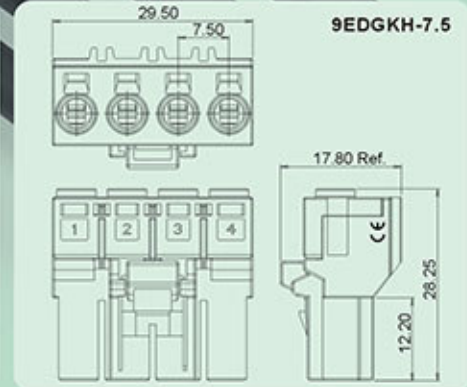


9EDGKH/RH-7.5

- 笼式弹簧连接技术;
- 采用塑壳锁扣方式,安全可靠;
- 产品识别标识;
- 焊针前后脚错位设计,满足UL600V电压要求;
- Spring-cage connection technology;
- Plastic clamp, safe and reliable;
- Products identification icon;
- Pins zigzag arrangement, meet UL 600V requirement;

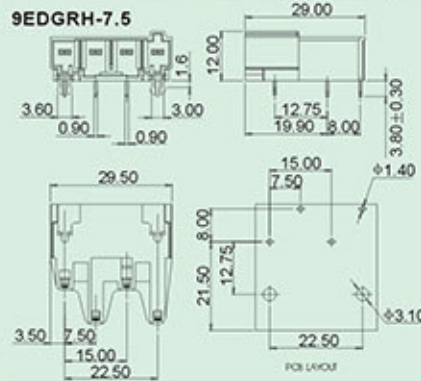

技术参数 Technical data

APPROVAL: CE

型号 Model	线径 Wire range (AWG/㎟)	线数 Poles	IEC61984技术参数 (IEC61984 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
9EDGKH-7.5	0.2-2.5/28-14	02-12P	800	17.5	600	16
9EDGRH-7.5	-	02-12P	800	17.5	600	16

应用行业 Application

工业自动化, 电梯, 新能源, 电力电气, 仪器仪表, 机械, 轨道交通等行业
 industrial automation, elevator, new energy, electric power, instrument, machinery, railway transport.



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
9EDGKH-7.5	25	9EDGKH-7.5	25
9EDGKH-7.5	25	9EDGKH-7.5	25
9EDGKH-7.5	25	9EDGKH-7.5	25
9EDGKH-7.5	25	9EDGKH-7.5	25
9EDGKH-7.5	25	9EDGKH-7.5	25
9EDGKH-7.5	25	9EDGKH-7.5	25

型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
9EDGKH-7.5	-	-
9EDGRH-7.5	-	-

产品订货 How to order

9EDGKH-7.5	X	X	P	1	3	0 0 (Alt)
Series NO.	NO. of pole					Standard
	1 Single pitch	2 Double pitch	3	通用色 General Color	PANTONE 419C	DEGSON 03
				Black		
9EDGRH-7.5	X	X	P	1	3	0 0 (Alt)
Series NO.	NO. of pole					Standard
	1 Single pitch	2 Double pitch	3	通用色 General Color	PANTONE 419C	DEGSON 03
				Black		