


DG138T-10.16-09A

- 接线口加长, 加大绝缘距离。
- 在00A基础上UL电流由60A增加到70A。
- Lengthen the wire hole, increase the insulation distance.
- On the basis of 00A, the UL rated current is increased from 60A to 70A.

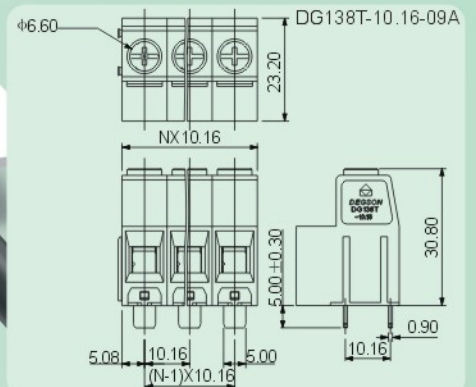

技术参数 Technical data

APPROVAL: CE

型号 Model	线径 Wire range (AWG/㎟)	线数 Poles	IEC60947技术参数 (IEC60947 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG138T-10.16-09A	20-6/0.5-16	02-XXP	1000	76	600	70

应用行业 Application

工业自动化, 仪器仪表, 电梯, 新能源, 电力电气, 电源等行业。
industrial automation, instrument, elevator, new energy, electric power, power supply.



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG138T-10.16-02P-09A	25	DG138T-10.16-08P-09A	25
DG138T-10.16-03P-09A	25	DG138T-10.16-09P-09A	25
DG138T-10.16-04P-09A	25	DG138T-10.16-10P-09A	25
DG138T-10.16-05P-09A	25	DG138T-10.16-11P-09A	25
DG138T-10.16-06P-09A	25	DG138T-10.16-12P-09A	25
DG138T-10.16-07P-09A	25		

型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
DG138T-10.16-09A	LUP 10.16/90	MKDS 10 HV/...-ZB-10.16

产品订货 How to order

