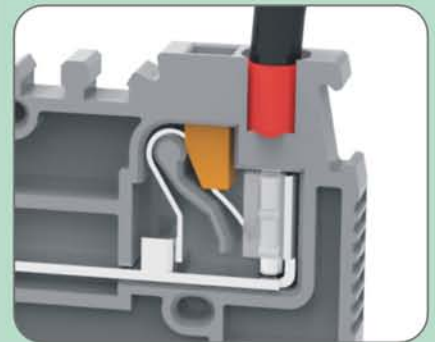
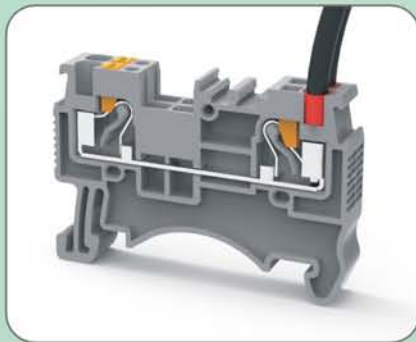
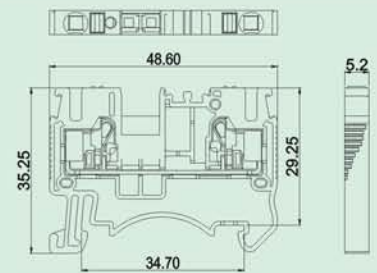
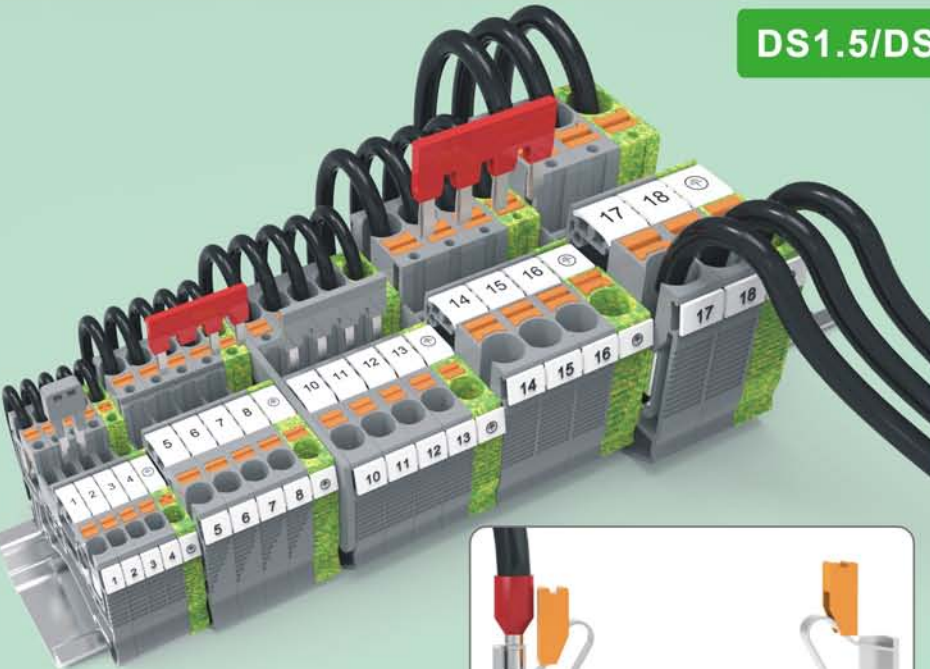


DS1.5/DS2.5/DS4/DS6/DS10/DS16

- Push-in 直插式连接技术, 操作更快捷;
- 蝶型弹簧结构, 抗振性能好;
- 插入式桥接附件, 提供02P-10P多种选择。
- Push-in connection technology, fast operation;
- Push-in spring structure, excellent vibration resistance;
- Plug-in Jumping Accessories; 02P-10P Available.


技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数 (IEC60947 datasheet)		UL1059技术参数 (UL1059 datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DS1.5	0.2-1.5mm ² /26-14AWG	1P	500	17.5	600	15
DS2.5	0.2-4mm ² /26-12AWG	1P	800	24	600	20
DS4	0.2-6mm ² /26-10AWG	1P	800	32	600	30
DS6	0.5-10mm ² /20-8AWG	1P	1000	41	600	40
DS10	0.5-16mm ² /20-6AWG	1P	1000	57	600	60
DS16	0.5-25mm ² /20-4AWG	1P	1000	76	600	85

型号对照 Cross Reference


DEGSON	同行1/ Competitor1	同行2/ Competitor2
DS2.5	PT2.5	-

应用行业 Application

 轨道交通、机械、电梯、电力电气等行业。
 Railway transportation, machinery, elevator, electric power etc.

产品匹配 Counterparts

DFB1.5	DS1.5
DFB2.5	DS2.5
DFB4	DS4
DFB6	DS6
DFB10	DS10

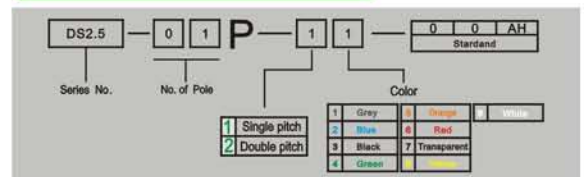产品订货 How to order

产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DS1.5	50	DS1.5-PE	50
DS2.5	50	DS2.5-PE	50
DS4	50	DS4-PE	50
DS6	50	DS6-PE	50
DS10	50	DS10-PE	50
DS16	50	DS16-PE	50